

# Flooring by SelecTech, Inc.

Construction	
<b>Dimensions</b> (finished surface)	48.03" x 7.09" 220 mm x 180 m
Coverage	2.36 sq ft/tile 0.22 sq meter/plank
Thickness	.165" 4.2 mm
Commercial Wear Surface	12 mil (0.3 mm) vinyl Urethane Wear Coat
Weight	4.2 lbs/plank
Product Dimensions	48"L x 7.09" W x .165" H
Packaging	2.36 sq. ft/plank, 12 planks/box 28.37 sq. ft/box. Weight: 51 lbs./box
Performance Characteristics	
Stain Resistance	Excellent
Maintenance Requirements	No Wax
Warranty	25-Year Residential Warranty
Physical Properties	
Abrasion Resistance	<0.01 gram weight loss ASTM D-3389
Coefficient of Friction	0.70
Conforms to ADA	ASTM D-2047
Critical Radiant Flux	>0.45 watts/cm²
Meets Class I Fire Rating	ASTM E-648
Smoke Density	<450 <b>ASTM E-662</b>
Static Load Resistance	250 psi <b>ASTM F-970</b>
Environmental Quality	
<b>Air Quality</b> Meets Requirement for LEED IEQ 4.3	CA Prop. 1350 IEQ Protocol







Available in a woodgrain style that adds an elegant decor to your space.

Colors in images will vary from monitor to monitor.

If color is critical we highly recommend ordering a sample.




### **Easy Click N' Go Installation**

Click N' Go™ is a plank style flooring with an interlocking tongue and groove.

Our Click N' Go™ is made with a durable and waterproof composite.

Available in a woodgrain style that adds an elegant decor to your basement space.

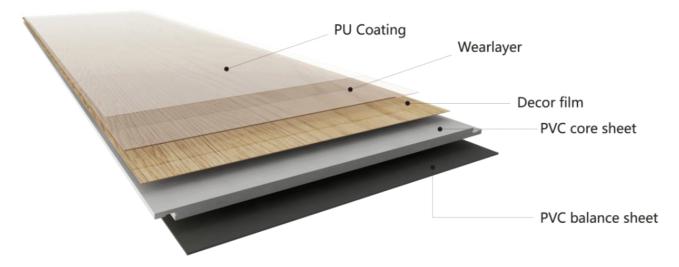

#### **Rugged and Reliable**

**Click N' Go™** flooring is made with a rugged, resilient plastic that resists moisture and installs easily over a variety of subfloors, including below grade.







## No adhesives... No special tools... No special skills...

## **Contact Us For More Information:**

Place N' Go (a division of SelecTech, Inc.) 33 Wales Ave, Unit F, Avon, MA. 02322 Phone: (877) 738-4537